


### 特征 Features

- 开关速度小;Fast Switching Device
- 最大功率耗散 250mW ; Power Dissipation of 250mW
- 高稳定性和可靠性。High Stability and High Reliability
- 反向漏电流小。Low reverse leakage

### SOD-323

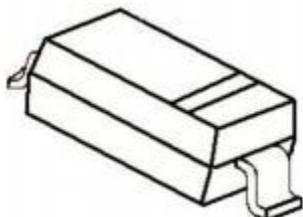

### 机械数据 Mechanical Data

- 封装 : SOD-323 封装 SOD-323 Small Outline Plastic Package
- 极性 : 色环端为负极 Polarity: Color band denotes cathode end
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position:Any

### Ordering Information

Type No.	Marking	Package Code
1SS355	A	SOD-323

### 极限值和温度特性(T<sub>A</sub> = 25℃ 除非另有规定)

Maximum Ratings & Thermal Characteristics (Ratings at 25℃ ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
反向电压 Reverse Voltage	V <sub>R</sub>	80	V
反向峰值电压 Peak Reverse Voltage	V <sub>RM</sub>	90	V
功率消耗 Power Dissipation	P <sub>d</sub>	250	mW
工作结温 Operating junction temperature	T <sub>J</sub>	150	℃
存储温度 Storage temperature range	T <sub>s</sub>	-55+150	℃
平均整流电流 Average Rectified Current	I <sub>O</sub>	100	mA
正向(不重复)电流 Non-repetitive Peak Forward Current	I <sub>FM</sub>	225	mA





Valid provided that electrodes are kept at ambient temperature.



电特性 Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified).

符号 Symbols	参数 Parameter	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
IR	反向漏电电流 Reverse Leakage Current	VR=80V	---	0.1	uA
	正向电压 Forward Voltage				
V <sub>F</sub>	反向恢复时间 Reverse Recovery Time	IF= 10mA, VR=6V	---	4	nS
	结电容 Capacitance	RL=100Ω			
C	反向恢复时间 Reverse Recovery Time	VR=0.5V, f=1MHZ	---	3	pF
	结电容 Capacitance				


Typical Characteristics

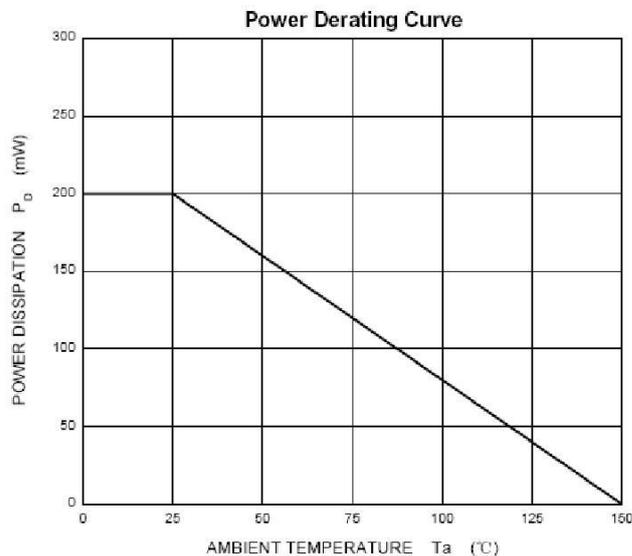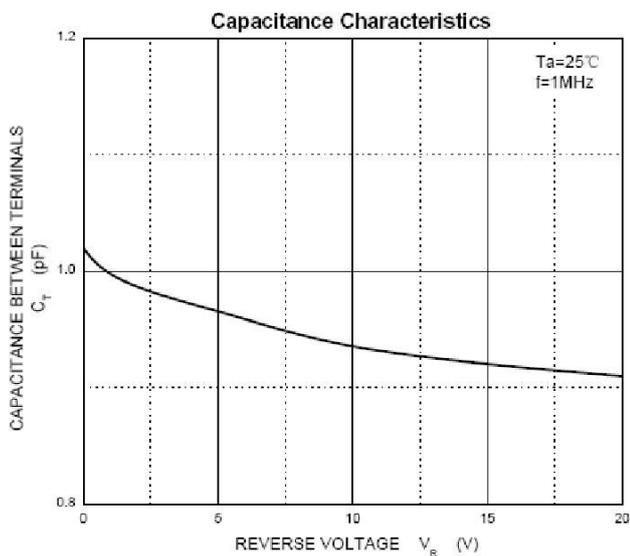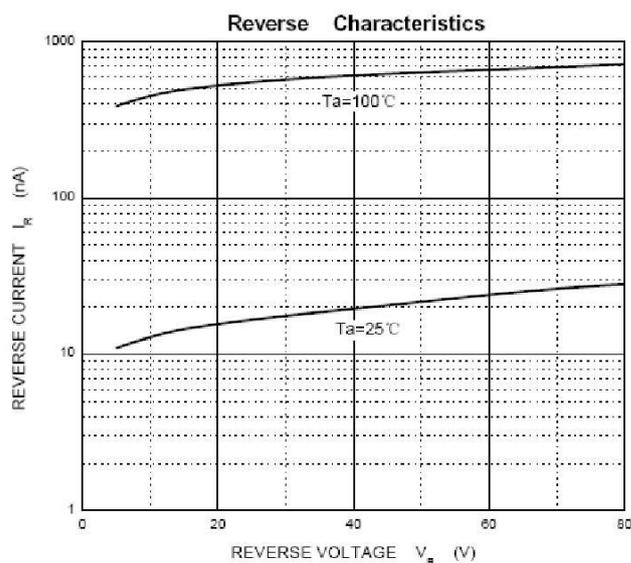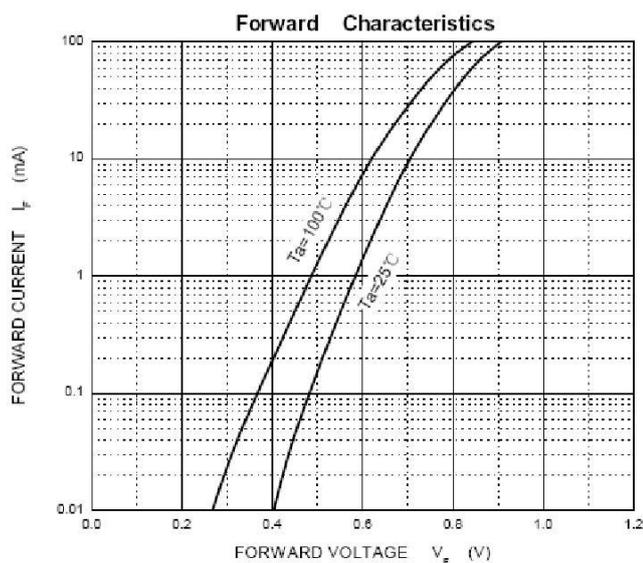



## SOD-323 PACKAGE OUTLINE

Plastic surface mounted package

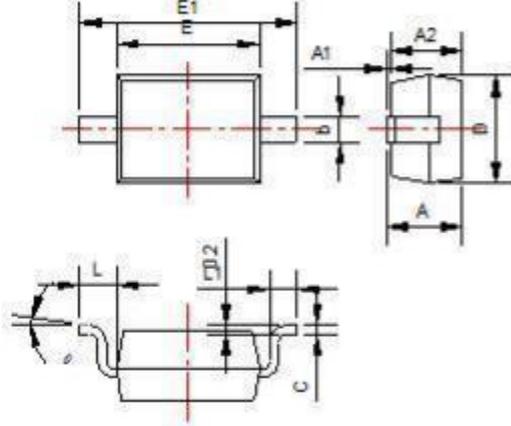

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A		1.000
A1	0.000	0.100
A2	0.800	0.900
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
$\theta$	0°	8°